

HYDROMETER DN 63&100

Usable with liquid or gaseous fluids that do not attack chemically the alloys of copper, do not present a high stickiness and do not crystallize.

Their preferable application is in pneumatic and hydraulic circuits, compressors, filters and pressure regulators. They fulfil norm CE.

Constructive and functional characteristics:

Accuracy:

Type 1,6 according to EN 837-1.

Ranges: 0/6 to 0/400 mWS according to DIN 16 128.

Ambient temperature: -20...+60°C.

Process fluid temperature: Max. +60°C.

Temperature error:

Additional error when the temperature of the pressure element deviates from 20°C. +/-0,3% every 10 °C of change.

Working pressure: Max 75% of E.S.

Temporary overpressure: Not applicable.

Process connection Racord: In brass.

Elastic element: Phosphoric bronze. In "C" for ≥ 40 bar scales. In spiral for >40 bar scales.

Case: Ø63 In ABS plastic. Ø100 in painted black aluminium.

Window: Clear plastic.

Movement: In brass.

Pointer: Painted black aluminium.

Optional extras:

Tin-silver welding.

Glass window.

Others accuracy ranges.



This publication does not try to establish the bases of a contract and the company keeps the right to modify without previous notice the design and the specifications of the instruments, in accordance with his politics of continued development.



MEI Manometría e Instrumentación, s.l.

Pol. Ind. "Gelidense" 3, nave 19 E-08790 Gelida - Barcelona

Tf. +34 937083 110 Fax. +34 937 083 109

www.mei.es e-mail: info@mei.es

DIMENSIONS

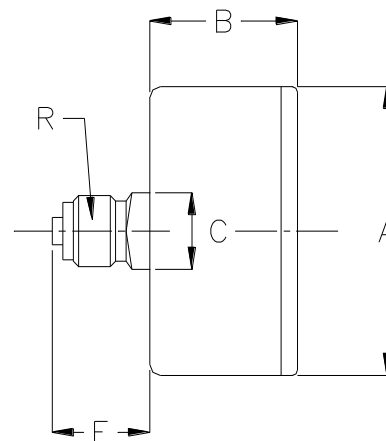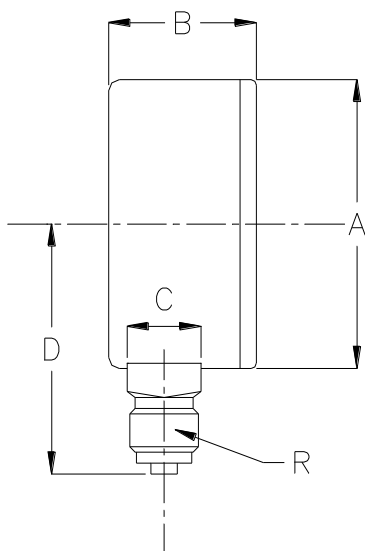

LOWER CONNECTION TYPE					
DN	A	B	C	D	R
63	63,5	28	14x14	51	1/4"
100	100	35	22x22	85	1/2"

**DIMENSIONS
(mm)**

BACK CONNECTION TYPE					
DN	A	B	C	E	R
63	63,5	28	14x14	19	1/4"

This publication does not try to establish the bases of a contract and the company keeps the right to modify without previous notice the design and the specifications of the instruments, in accordance with his politics of continued development.

MEI Manometría e Instrumentación, s.l.

Pol. Ind. "Gelidense" 3, nave 19 E-08790 Gelida - Barcelona

Tf. +34 937083 110 Fax. +34 937 083 109 www.mei.es e-mail: info@mei.es